

## Trix

### Technical data sheet

Rev. 11.12.2023

**Manufacturer:** Vitrealpecchi spa

**Base product:** float glass to EN 572 1-2.

**Description and performance:** one side of the plate is chemically and permanently etched so that it partially screens vision whilst allowing light through. Its texture is pleasantly touch-sensitive, thin brilliant lines mark the satin surface.

Exceptional fingerprint resistance and easy to clean.

**Applications:**

Internal: doors, partitions walls, furniture, shower screens etc.

External: façades, parapets, shelters etc.

**Sheet sizes:** 2250/2400 x 3210 mm (useful 2210/2360 x 3170 mm).

**Pattern length:** 3210mm in 2250x3210mm sheets /2400 mm in 2400x3210mm sheets. Please verify standard availabilities when ordering.

**Thicknesses:** monolithic float glass 4/5/6/8/10/12 mm.


**Colours:** extraclear, clear, bronze, grey, green, blue.

Availability of standard colours/thicknesses is subject to change. Please verify when ordering.

**Weight:** 2.5 kg/m<sup>2</sup> per millimetre of thickness.

**Compatible processing:** all mechanical and thermal processes compatible with the base material: cutting, grinding, bevelling, drilling, laminating, toughening, bending, double glazing, painting, enamelling etc.

**Cleaning:** care must be taken when installing the glass not to get putty, resin, sealants, etc., on the treated side. Each of these substances requires a specific solvent for removing traces from glass. For routine maintenance, use water and/or any of the commonly marketed glass detergents. Dry immediately with a clean cloth, preferably micro-fibre.

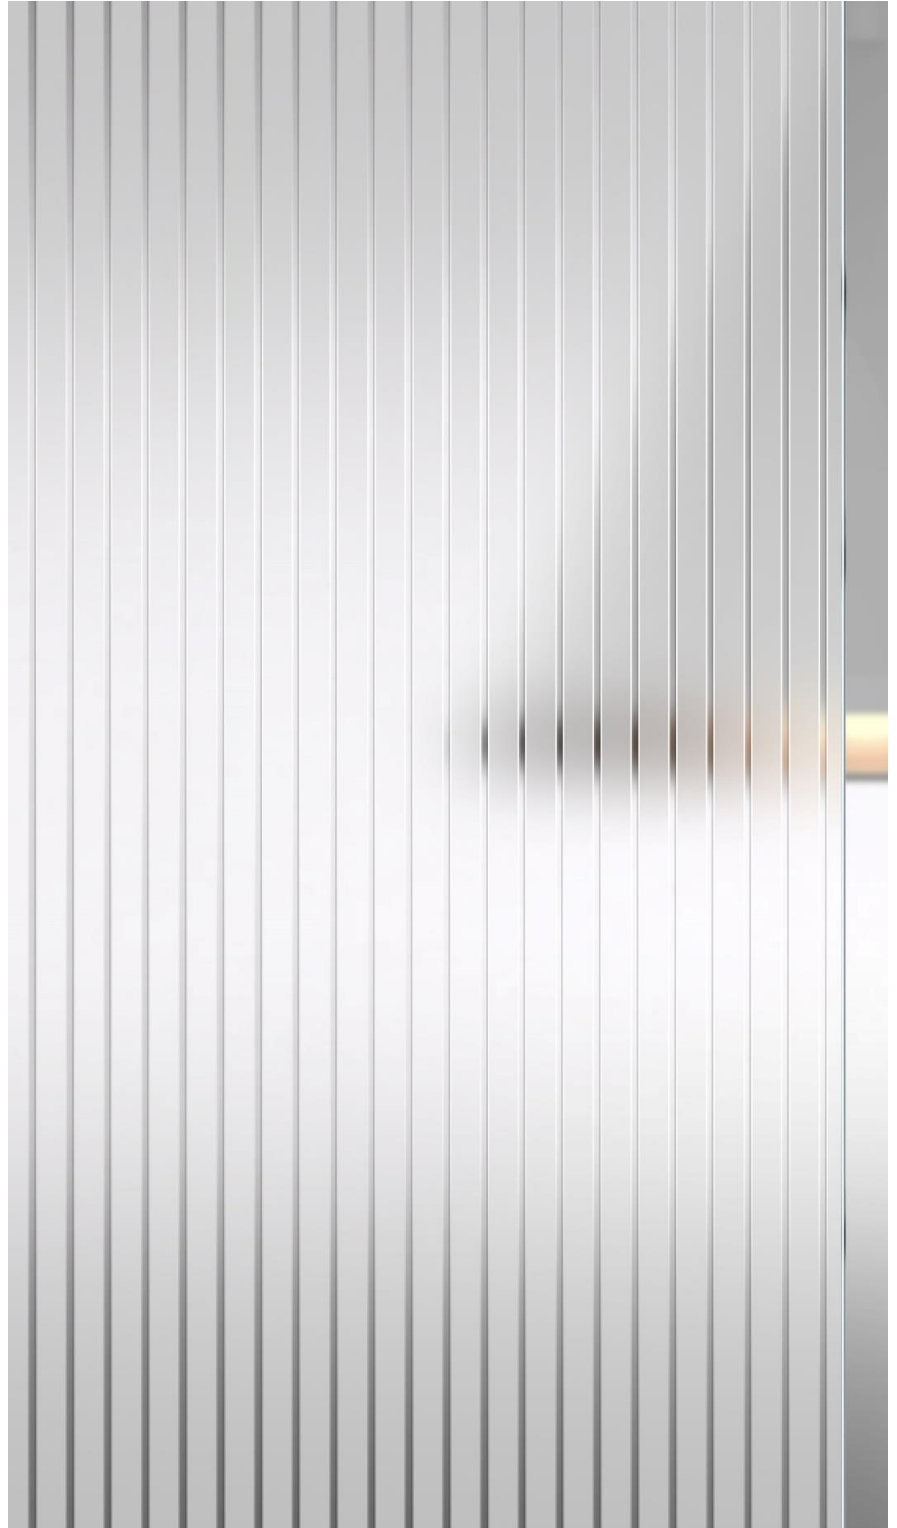

Colours and finishings in the photographs may look slightly different from those of the real products: we recommend that customers examine sample glass before choosing



## Trix

### Storage and handling:

- it is advisable to unpack immediately after reception and store in a dry, well-ventilated place free from sudden changes of temperature to avoid condensation;
- never store outdoors;
- when storing for over 3 months, it's advisable to remove the paper from between the plates;
- in case of storage in unfavourable environmental conditions (high humidity and strong temperature changes), it is advisable to slightly space one plate from another;
- storing for more than 12 months is not advisable;
- to avoid scratching the surface of the glass during handling and storage, plates should always be separated by means of spacers.

**Defect acceptance limits:** for all defects coming from float glass production: as per UNI EN 572.2. For all defects coming from the chemical processing:

DEFECT SIZE mm	MAX DEFECT NO. / SHEET	AVERAGE NO. / 20 SMQ
> 0,6 e < 1,5	4	6
> 1,5 e < 3,0	2	3
> 3,0 e < 9,0	Upon customer's acceptance only	Upon customer's acceptance only
Longitudinal pattern deviation tolerance: 1mm/1m.		

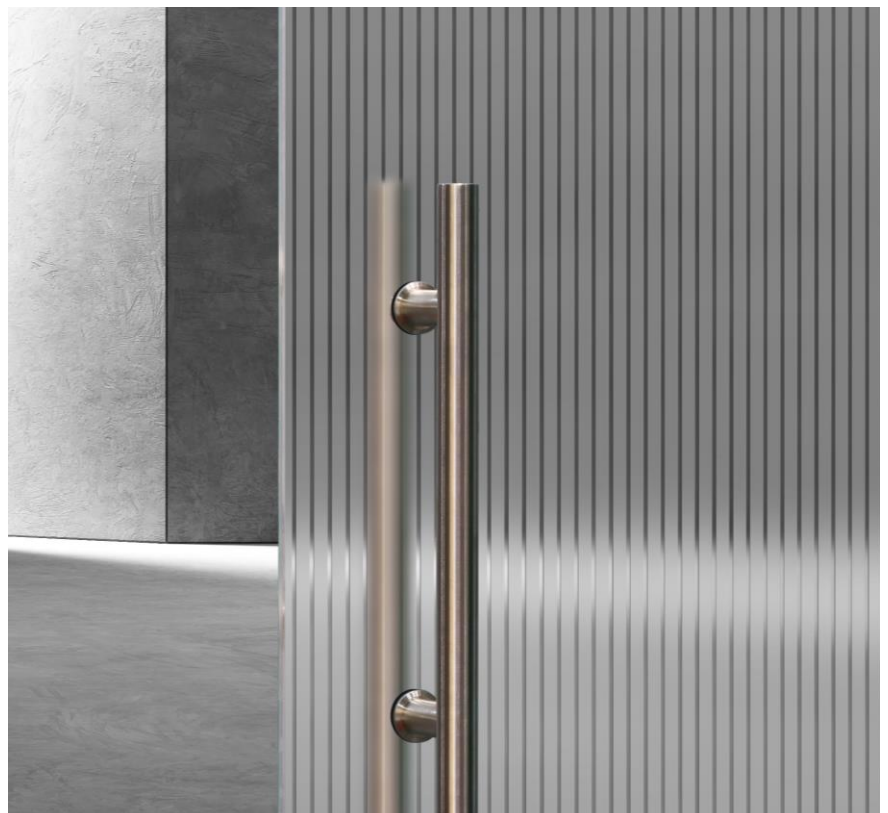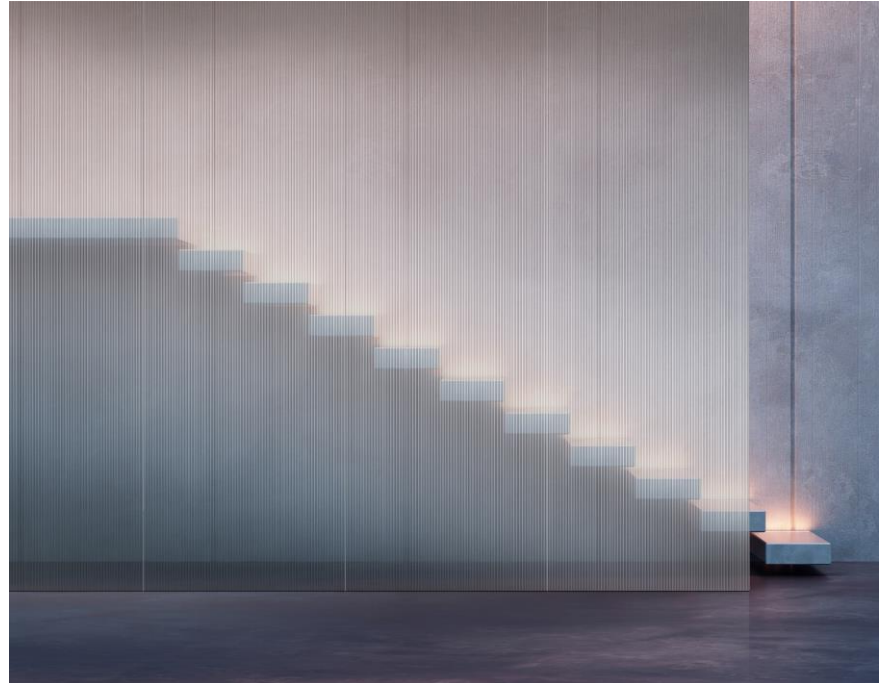

Colours and finishings in the photographs may look slightly different from those of the real products: we recommend that customers examine sample glass before choosing