


ECOSAT MATE' LAC

TECHNICAL DATA - Rev.26.06.2020

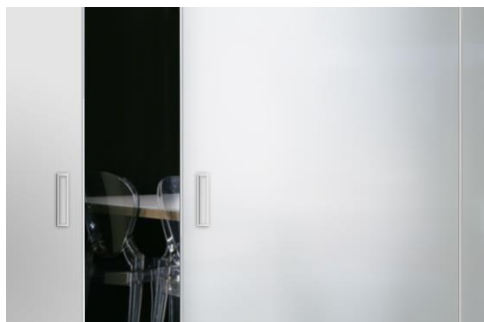

Manufacturer: Vitrealpecchi spa

Base product: float glass painted on one side (Lacobel)

Description and performance: the non-painted side of the plate is chemically and permanently satin finished. The high-quality, opaque paint, industrially applied to the back of the glass, adheres flawlessly. Exceptional fingerprint resistance and easy to clean.

Plate size: 2250 x 3210 mm (useful size 2210 x 3170 mm)

Thickness: 4 mm

Colour: pure white.

Weight: 2.5 kg/m² per millimeter of thickness

Compatible processing: all mechanical process associated with glass: cutting, grinding, bevelling, etching, drilling, etc. It cannot be tempered, laminated nor used in insulated glazing units.

For full details on transformation processes, we recommend visiting www.yourglass.com/ product: Lacobel.

Installation: the varnished back of the glass must be always positioned against the surface to be covered. Positioning it in this way also preserves the colour and appearance of the glass. For full details on applications, we recommend to consult the technical data sheet of Lacobel product in www.yourglass.com/

Cleaning: care must be taken when installing the glass not to get putty, resin, sealants, etc., on the treated side. Each of these substances requires a specific solvent for removing traces from glass. For routine maintenance, use water and/or any of the commonly marketed glass detergents. Dry immediately with a clean cloth, preferably micro-fibre.

Internal applications only: wall claddings, doors and partitions claddings, wardrobe doors and furniture, kitchen furniture, receptions desks etc. can be used in damp environments (kitchens, bathrooms, etc.) but should never be immersed in water. For full details on transformation processes and applications, we recommend to consult the technical data sheet of Lacobel product in www.yourglass.com/

Storage and handling:

- it is advisable to unpack immediately after reception and store in a dry, well-ventilated place free from sudden changes of temperature to avoid condensation;
- never store outdoors;
- when storing for over 3 months, it's advisable to remove the paper from between the plates;
- in case of storage in unfavourable environmental conditions (high humidity and strong temperature changes) it is advisable to slightly space one plate from another;
- storing for more than 12 months is not advisable;
- to avoid scratching the surface of the glass during handling and storage, plates should always be separated by means of spacers.

Defect acceptance limits: for all defects coming from the base glass, refer to the technical data sheet of Lacobel product in www.yourglass.com/ ; for all defects coming from the chemical processing:

DEFECT SIZE mm	MAX DEFECT NO./ SHEET	AVERAGE NO./ 20 SMQ
> 0,6 and < 1,5	3	5
> 1,5 and < 3,0	1	2
> 3,0 and < 9,0	Upon customer's acceptance only	Upon customer's acceptance only