


LINO

TECHNICAL DATA SHEET – rev. 21.05.2024

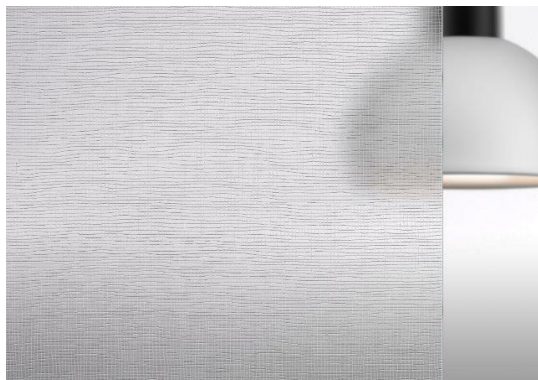

Manufacturer: VitrealSpecchi spa

Base product: float glass to EN 572-2.

Description and performance: one side of the plate is chemically and permanently etched so that it partially screens vision whilst allowing light through. Its texture is satin-finish and very slightly in relief with respect to the slightly etched, brilliant ground. Exceptional fingerprint resistance and easy to clean.

Sheet sizes: 2250/2400 X 3210 mm (usable 2210/2360x3170 mm)

Thicknesses: monolithic float glass 4/5/6/8/10 mm.

Colours: extraclear, clear, bronze, grey.

► *Availability of standard colours/thicknesses is subject to change. Please verify when ordering.*

Weight: 2.5 kg/m² per millimetre of thickness

Compatible processing: all mechanical and thermal processes compatible with the base material: cutting, grinding, bevelling, drilling, laminating, toughening, bending, double glazing, painting, etc.

Cleaning: care must be taken when installing the glass not to get putty, resin, sealants, etc., on the treated side. Each of these substances requires a specific solvent for removing traces from glass. For routine maintenance, use water and/or any of the commonly marketed glass detergents. Dry immediately with a clean cloth - preferably micro-fibre.

Storage and handling:

- it is advisable to unpack immediately after reception and store in a dry, well-ventilated place free from sudden changes of temperature to avoid condensation;
- never store outdoors;
- when storing for over 3 months, it's advisable to remove the paper from between the plates;
- in case of storage in unfavourable environmental conditions (high humidity and strong temperature changes), it is advisable to slightly space one plate from another;
- storing for more than 12 months is not advisable;
- to avoid scratching the surface of the glass during handling and storage, plates should always be separated by means of spacers.

Applications:

Internal applications: doors, partitions walls, furniture, shower screens etc.

External applications: façades, parapets, shelters etc.

Defect acceptance limits: for any defect coming from float glass production: as per UNI EN 572.2. For any defect coming from the chemical processing:

CATEGORY	DEFECT SIZE mm	MAX DEFECT NO./ SHEET	AVERAGE NO./ 20 SMQ
A	> 0,6 and < 1,5	4	6
B	> 1,5 and < 3,0	2	3
C	> 3,0 and < 9,0	Upon customer's acceptance only	Upon customer's acceptance only