

## Logos-T

### Technical data sheet

Rev. 01.03.2025

**Manufacturer:** Vitrealspecchi spa

**Base product:** float glass to EN 572 1-2.

**Description and performance:** one side of the plate is chemically and permanently etched without affecting the transparency of the glass; its texture is slightly raised. Very easy to clean.

**Applications:**

Internal and external applications: doors, partitions walls, furniture, shower screens etc.

**Sheet sizes:** 2250 x 3210 mm  
(useful 2210 x 3170 mm).

**Thicknesses:** monolithic float glass  
4/5/6/8/10 mm.

**Colours:** extraclear, clear, bronze, grey.


*Availability of standard colours/thicknesses is subject to change. Please verify when ordering.*

**Weight:** 2.5 kg/m<sup>2</sup> per millimetre of thickness.

**Compatible processing:** all mechanical and thermal glass processes: cutting, grinding, bevelling, drilling, laminating, toughening, bending, double glazing, painting, enamelling etc.

**Cleaning:** care must be taken when installing the glass not to get putty, resin, sealants, etc., on the treated side. Each of these substances requires a specific solvent for removing traces from glass.

For routine maintenance, use water and/or any of the commonly marketed glass detergents. Dry immediately with a clean cloth - preferably micro-fibre.

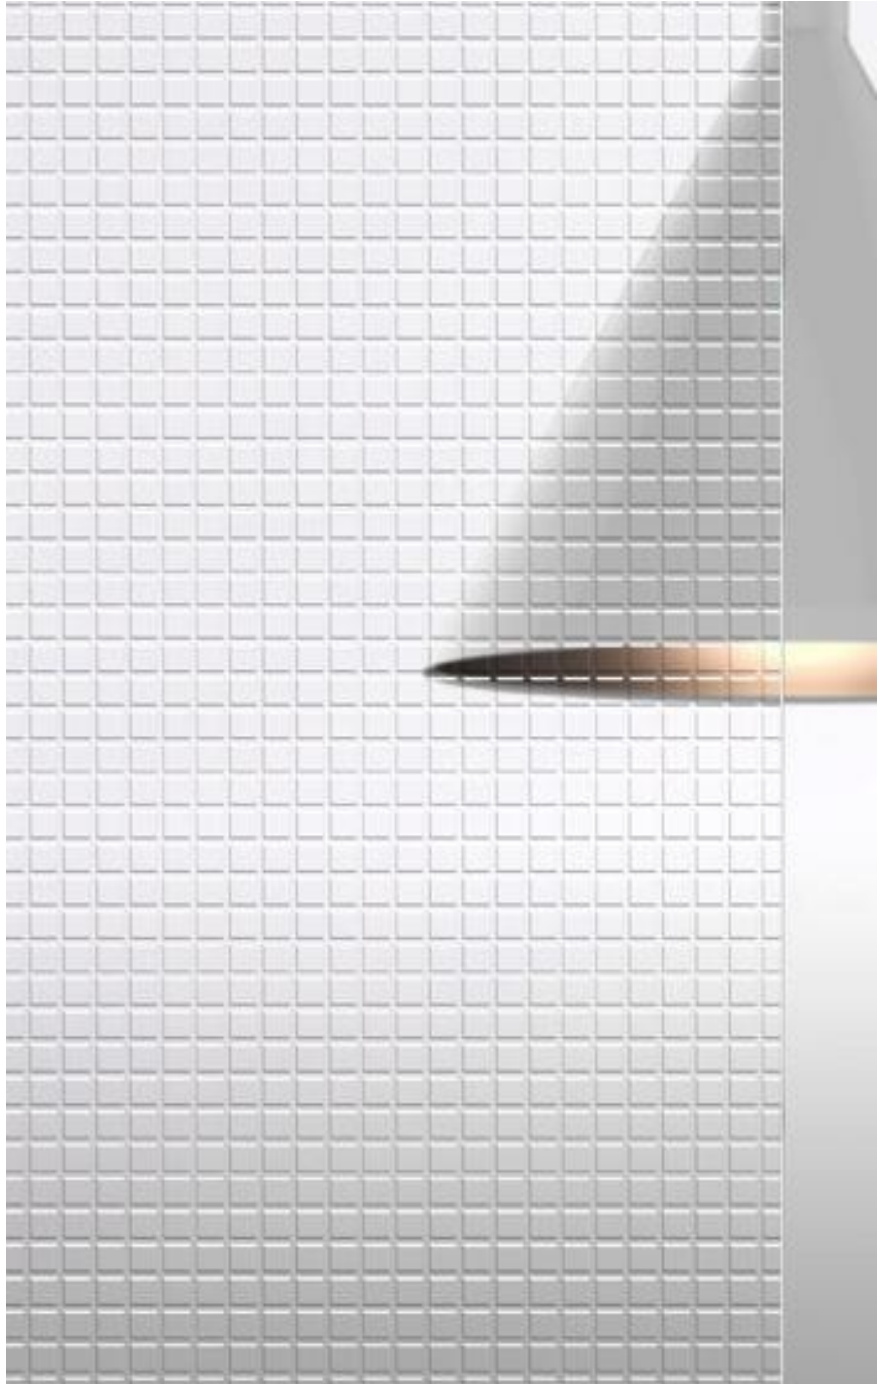

Colours and finishings in the photographs may look slightly different from those of the real products: we recommend that customers examine sample glass before choosing products.


## Logos-T

### Storage and handling:

- it is advisable to unpack immediately after reception and store in a dry, well-ventilated place free from sudden changes of temperature to avoid condensation;
- never store outdoors;
- when storing for over 3 months, it's advisable to remove the paper from between the plates;
- in case of storage in unfavourable environmental conditions (high humidity and strong temperature changes), it is advisable to slightly space one plate from another;
- storing for more than 12 months is not advisable;
- to avoid scratching the surface of the glass during handling and storage, plates should always be separated by means of spacers.

**Defect acceptance limits:** for all defects coming from float glass production: as per UNI EN 572.2. For all defects coming from the chemical processing:

| DEFECT SIZE mm  | MAX DEFECT NO. / SHEET          |
|-----------------|---------------------------------|
| > 0,6 and < 1,5 | 4                               |
| > 1,5 and < 3,0 | 2                               |
| > 3,0 and < 9,0 | Upon customer's acceptance only |

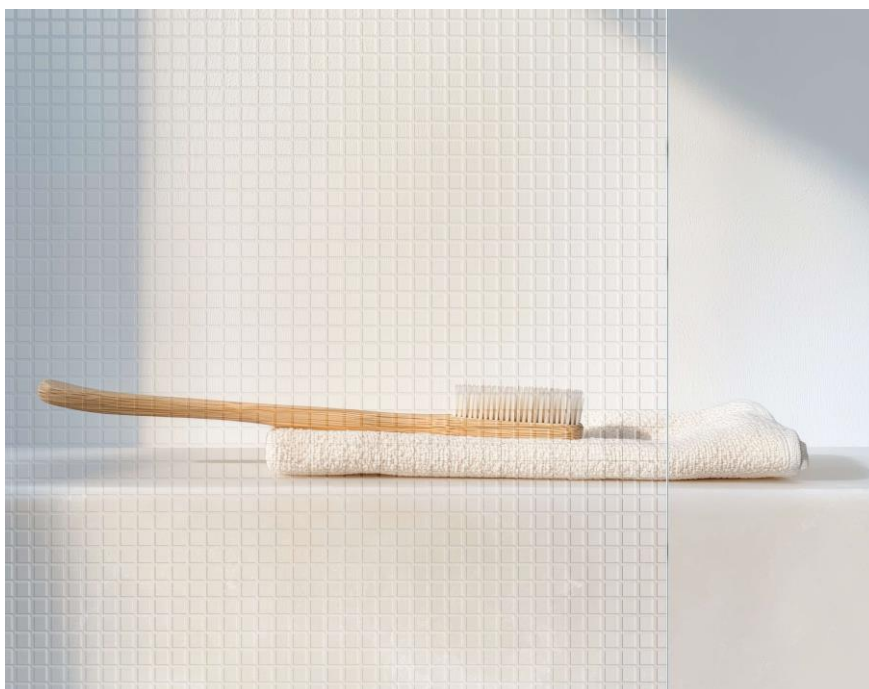

Colours and finishings in the photographs may look slightly different from those of the real products: we recommend that customers examine sample glass before choosing products.