


SGG TIMELESS® DESIGN MOVIE
TECHNICAL DATA SHEET – Rev. 09.01.2017

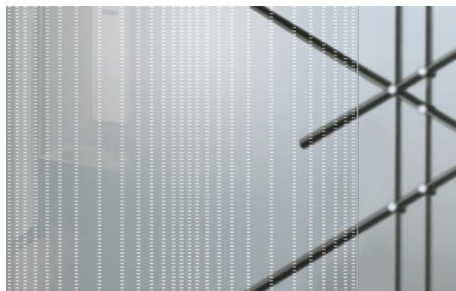

Manufacturer: VitrealSpecchi spa

Base product: float glass SGGTimeless®*.

Description: the glass is treated on one side with a practically invisible magnetronic coating that protects it against corrosion*; the other side is chemically processed to give a permanent satin textured finish that's perfectly smooth to the touch, on a transparent base.

Linear patterns may be parallel to 3210 mm side or to 2250 mm side. Please verify when ordering.

Applications and performance: SGGTimeless® Design Movie was developed for bathroom applications and can be installed in shower boxes or on bathtub panels because the SGGTimeless® anti-corrosion function simplifies maintenance: its surface facilitates the run-off of water, thus limiting the formation of limescale, soap residues and condensation.

SGGTimeless® Design's anti-corrosion performance is guaranteed for 10 years.*

Sheet sizes: 2250 x 3210 mm (usable 2210x3170 mm)

Thickness: 8 mm

Colour: clear

Weight: 2.5 kg/m² per millimetre of thickness

Transformation: SGGTimeless® Design Movie must be tempered to obtain the functional properties of the finished product. To avoid scratching the coating, clean tools and materials must be used in all phases of transformation. Thoroughly dry the glass after each phase of transformation to prevent traces of water becoming indelible after tempering*.

SGGTimeless® Design Movie cannot be laminated.

Installation: the glass must be installed with the SGGTimeless® coating face the inside of the shower box*.

Maintenance: for routine maintenance, use water and/or any of the commonly marketed glass detergents. Dry immediately with a clean cloth - preferably micro-fibre - by wiping repeatedly gently in the same direction. Don't use abrasive tools or products containing abrasive powders.

Storage and handling:

- it is advisable to unpack immediately after reception and store in a dry, well-ventilated place free from sudden changes of temperature to avoid condensation;
- never store outdoors;
- when storing for over 3 months, it's advisable to remove the paper from between the plates;
- in case of storage in unfavourable environmental conditions (high humidity and strong temperature changes), it is advisable to slightly space one plate from another;
- storing for more than 12 months is not advisable;
- to avoid scratching the surface of the glass during handling and storage, plates should always be separated by means of spacers.

Processing defects acceptance limits: defects visible from a distance of min. 1.5 m..

* For further information, consult the SGG Timeless® brochure and the Guide to SGG Timeless® transformation.