

Trix-T

Technical data sheet

Rev. 15.10.2025

Manufacturer: Vitrealspecchi spa

Base product: float glass to EN 572 1-2

Description and performance: one side of the plate is chemically and permanently etched without affecting the transparency of the glass; its texture is slightly etched. Very easy to clean.

Applications: Internal applications: doors, partitions walls, furniture, shower screens etc. External applications: façades, parapets, shelters etc.

Sheet size: 2250/2400 x 3210 mm (usable 2210/2360 x 3170 mm).

Pattern length: 3210mm in 2250x3210mm sheets /2400 mm in 2400x3210mm sheets. Please verify standard availabilities when ordering.

Thicknesses: monolithic 4/5/6/8/10 mm.


Colours: extraclear, clear.

Availability of standard colours/thicknesses is subject to change. Please verify when ordering.

Weight: 2.5 kg/m² per millimetre of thickness.

Compatible processing: all mechanical and thermal processes compatible with the base material: cutting, grinding, bevelling, drilling, laminating, toughening, bending, double glazing, painting, etc.

Cleaning: care must be taken when installing the glass not to get putty, resin, sealants, etc., on the treated side. Each of these substances requires a specific solvent for removing traces from glass. For routine maintenance, use water and/or any of the commonly marketed glass detergents. Dry immediately with a clean cloth - preferably micro-fibre - by wiping repeatedly gently.

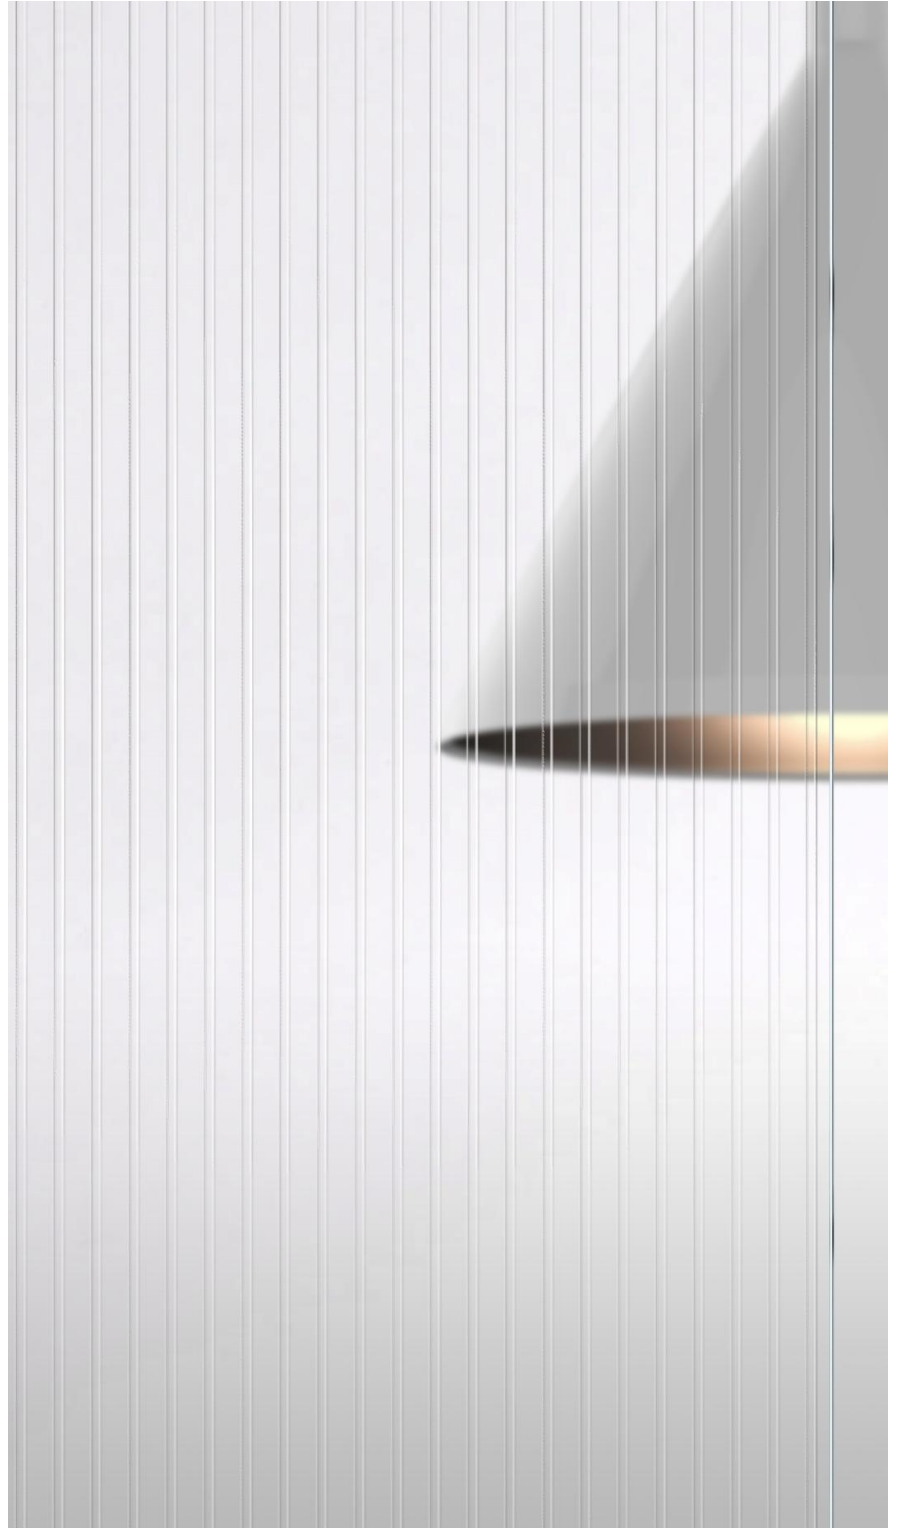

Colours and finishings in the photographs may look slightly different from those of the real products: we recommend that customers examine sample glass before choosing products.



Trix-T

Storage and handling:

- it is advisable to unpack immediately after reception and store in a dry, well-ventilated place free from sudden changes of temperature to avoid condensation;
- never store outdoors;
- when storing for over 3 months, it's advisable to remove the paper from between the plates;
- in case of storage in unfavourable environmental conditions (high humidity and strong temperature changes), it is advisable to slightly space one plate from another;
- storing for more than 12 months is not advisable;
- to avoid scratching the surface of the glass during handling and storage, plates should always be separated by means of spacers.

Defect acceptance limits: for any defect coming from float glass production: as per UNI EN 572.2. For any defect coming from the chemical processing:

DEFECT SIZE mm	MAX DEFECT NO. / SHEET
> 0,6 and < 2,5	5
> 2,5 and < 4,0	3
> 4,0 and < 9,0	Upon customer's acceptance only
Longitudinal pattern deviation tolerance: 1mm/1m.	

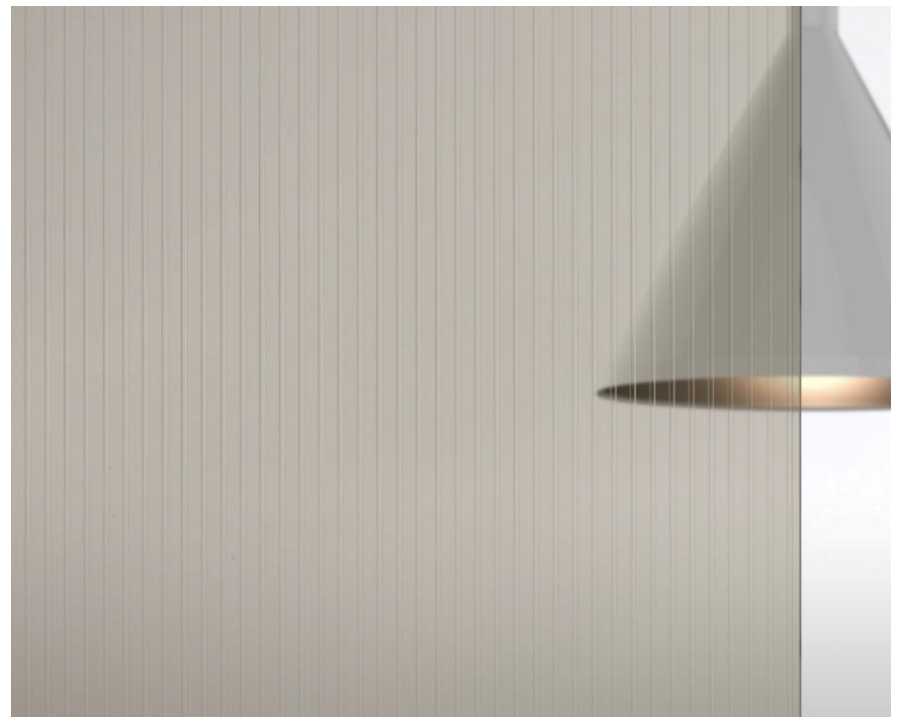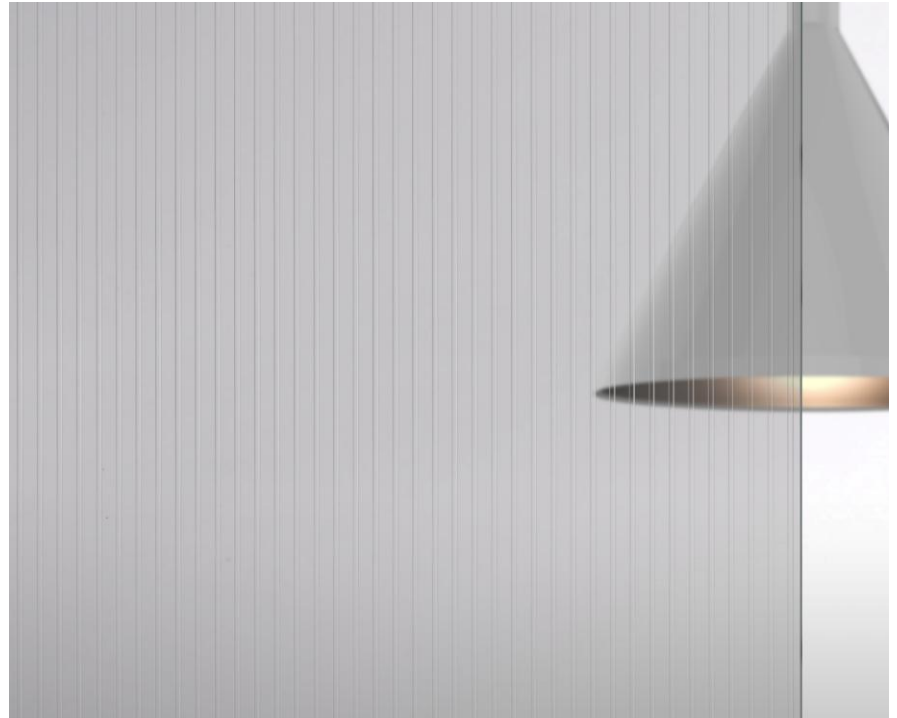

Colours and finishings in the photographs may look slightly different from those of the real products: we recommend that customers examine sample glass before choosing products.